
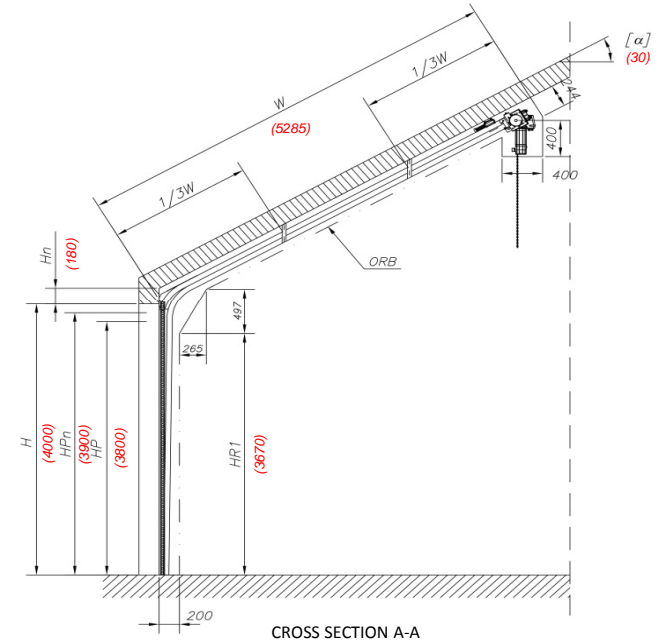
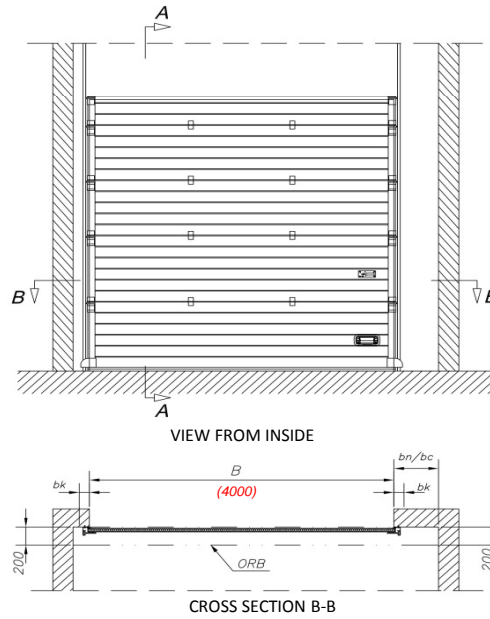


"FLH" LOW ALONG ROOF CONSTRUCTION

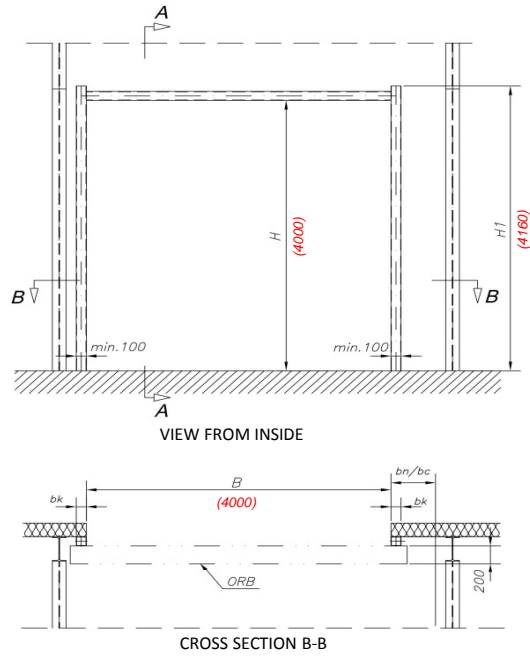


DESCRIPTION OF DIMENSIONS:

- ORB - workspace of the door
- B - opening width
- H - opening height
- Hn - headroom height
- bk - sideroom width with mounting bracket
- b min - sideroom width including perforated angles
- bc - sideroom width on chain mechanism side
- bn - sideroom width on drive side
- HP - passage height in the hand-operated door
- HPn - passage height in door with drive
- HR1 - workheight
- W - built-in depth (hand-operated door)
- H1 - height from the floor to the uppr edge of supporting structure
- Q - curtain's weight [kg/m2]
- P - area of door's curtain [m2]
- a - decrease of roof slope

1. The doors are produced to sizes according to actual pricelist KRISPOL.
2. To adjust the picture to selcted size it needs to be accordingly enlarged/reduced.
3. The exact value of Wn by using different types of drives according to actual Krispol price
4. Application of the relevant product is a prerequisite for its proper functioning.
5. To select the optimal solution, please contact your representative of Krispol company ---->>> www.krispol.eu

SYMBOL	SIZE LIMIT [mm]	DIMENSIONS ON THE DRAWING [mm]	
B	max.6000	4000	
H	max.5000	4000	
Hn	min.180	180	
bk	min.160	160	
b min	min.200	200	
bc	min.320	320	
bn	min.440	440	
HP	H-200	3800	
HPn	H-100	3900	
HR1	H-330	3670	
W	H+1285	5285	
H1	H+160	4160	
α	5°+35°	30	
P	K2 IS	P=max.20 [m ²] Q=max.13 [kg/m ²]	
	K2 IM	P=max.20 [m ²] Q=max.13 [kg/m ²]	
	K2 IP	P=max.20 [m ²] Q=max.13 [kg/m ²]	
	K2 IA	P=max.20 [m ²] Q=max.7 [kg/m ²]	
		16,00 [m ²]	208,0 [kg]
			112,0 [kg]

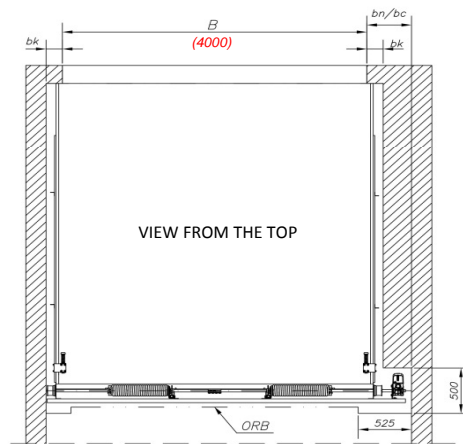

KRISPOL		KRISPOL Sp. z o.o. ul. Budowlana 1 Psary Małe, 62-300 Września	
INDUSTRIAL SECTIONAL DOOR			
"FLH" LOW ALONG ROOF CONSTRUCTION			
Format	A3	Scale	1:50
Type	K2 I	Drawing No	XYZ_K2IS_FLH_4000x4000_2018-8-7